



## UF-820E

**Double Flavor Twist  
Floor Model**



The Carpigiani UF-820E, new from the inside-out, is designed to meet the highest production demands. It will outperform all other machines including earlier UF-820 models. State-of-the-art technology makes this soft serve freezer simple and efficient to operate with greater flexibility. Designed to prevent many operational errors, the built-in memory provides pinpoint diagnosis.

### **Features Include:**

- Touchpad controls offer more flexibility and ease of use
- Patented mix injection system produces unmatched quality and consistency
- Unique freezing cylinder optimizes refrigeration efficiency
- Standby / energy conservation mode reduces cost of operation during idle periods
- Low mix light with audible signal
- Self-monitoring system minimizes costly errors
- Built-in memory stores information to facilitate repairs



Carpigiani-USA manufactures a complete line of ice cream production equipment: Batch Freezers, Soft Serve Freezers, Yogurt Freezers, Slush Freezers, Milk Shake Machines, Whipped Topping Dispensers, Granita Machines, Frozen Custard Freezers, Mix Processing Equipment and Display Cabinets...





*Something for everyone!*

# SPECIFICATIONS



## MODEL UF-820E

Two flavor "twist" floor model for the highest volume requirements. Pump only.

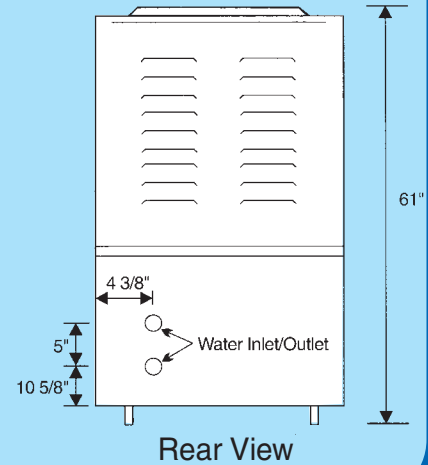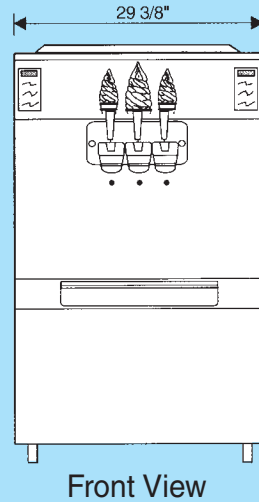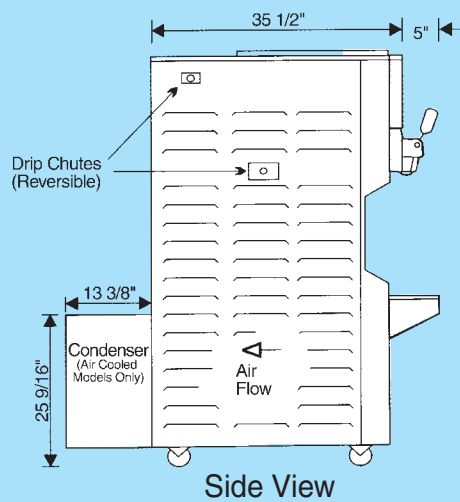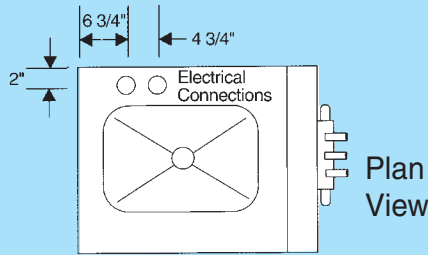

### Model UF-820E Description:

Overrun Range \_\_\_\_\_ Up to 80%  
 Mix Tank Capacity \_\_\_\_\_ 40 qts. each  
 Mix Tank Refrigeration Control \_\_\_\_\_ Electronic  
 Cylinder Refrigeration Control \_\_\_\_\_ Hard-O-Tronic  
 Cylinder Type \_\_\_\_\_ Helicoidal Path  
 Beater Construction \_\_\_\_\_ Stainless Steel  
 Beater Drive Motors \_\_\_\_\_ Two 2 H.P.  
 Compressor Motors \_\_\_\_\_ Two High output 3 H.P.  
 Water Connections \_\_\_\_\_ 1/2" M.P.T.  
 Condenser Cooling \_\_\_\_\_ Water (Air Optional)  
 Refrigerant Type \_\_\_\_\_ R-404A  
 Frame Type \_\_\_\_\_ Floor Model  
 Frame Construction \_\_\_\_\_ Welded Steel  
 Outer Panels \_\_\_\_\_ Stainless Steel  
 Width \_\_\_\_\_ 29.4 inches (747 mm)  
 Depth \_\_\_\_\_ 40.5 inches (1029 mm)\*  
 Height (w/o legs or casters) \_\_\_\_\_ 56 inches (1422 mm)

\* Water Cooled

Caster (swivel type) Height \_\_\_\_\_ 5 inches (127 mm)  
 Net Weight (w/o accessories) \_\_\_\_\_ 970 lbs. (441 kg)  
 Gross Weight (w/o accessories) \_\_\_\_\_ 1050 lbs. (447 kg)

### Electrical Requirements

Single Phase, 60 Hz \_\_\_\_\_ 208 - 230 V  
 Max Breaker / Fuse size \_\_\_\_\_ 30 Amps  
 Running Amps \_\_\_\_\_ 28 Amps (Water Cooled)  
 Three Phase, 60 Hz \_\_\_\_\_ 208 - 230 V  
 Max Breaker / Fuse size \_\_\_\_\_ 20 Amps  
 Running Amps \_\_\_\_\_ 17 Amps (Water Cooled)  
 Number of Feeders \_\_\_\_\_ 2  
 Nema # \_\_\_\_\_ 2 x L15-30

### Optional Accessories

- Mix Tank Wash Kit
- Adjustable legs



Distributed by:  
 GTI Designs  
 35 Trade Zone Court  
 Ronkonkoma, NY 11779

Tel: 800 896-4484  
 Fax: 631 981-3509  
 info@gtidesigns.com  
 www.gtidesigns.com

All technical data, pictures, and drawings contained in this document are not binding on the manufacturer, nor can the manufacturer be held liable for any modification of the machine in part or completely.