



## UF-253 G/P

**Double Flavor Twist  
Floor Model**



The high performance Carpigiani UF-253 soft serve freezer combines state-of-the-art design and technology with simple and efficient operation. The UF-253 provides high production for two individual flavors of frozen dessert and combination twist. This freezer will outperform any comparably-sized freezer. Designed to allow the greatest flexibility when changing products. Choose a gravity model, or select a pump model for increased performance and higher profits.

### **Features Include:**

- New electronics allow touchpad control of product in each cylinder
- Patented mix injection system produces unmatched product quality (pump version)
- Labor saving gravity mix feed system offers simple operation and smoother, creamier product
- Unique freezing cylinder optimizes refrigeration efficiency
- Standby / energy conservation switch reduces operation costs during idle periods
- Low mix indicator lights with audible signal
- Self-monitoring system minimizes costly errors
- Built-in memory stores information to facilitate repairs



Carpigiani-USA manufactures a complete line of ice cream production equipment: Batch Freezers, Soft Serve Freezers, Yogurt Freezers, Slush Freezers, Milk Shake Machines, Whipped Topping Dispensers, Granita Machines, Frozen Custard Freezers, Mix Processing Equipment and Display Cabinets...


*Something for everyone!*

# SPECIFICATIONS




## UF-253 G/P


Two flavor "twist" floor model. Maximum product versatility with optimum energy efficiency. Designed for high volume requirements. Gravity or pump.

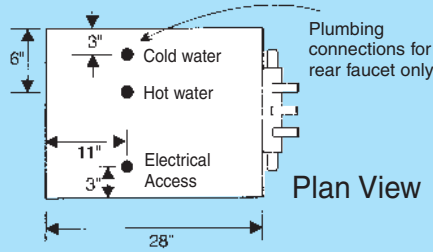


Plan View

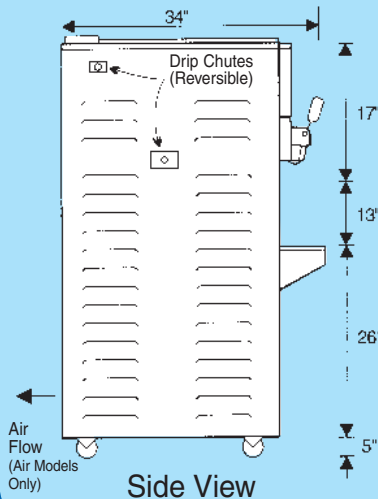

Side View

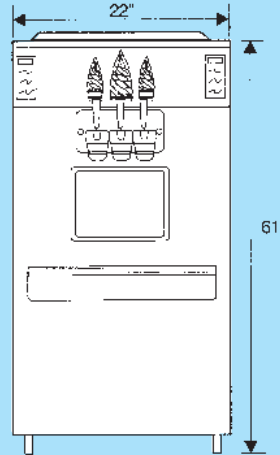

Front View

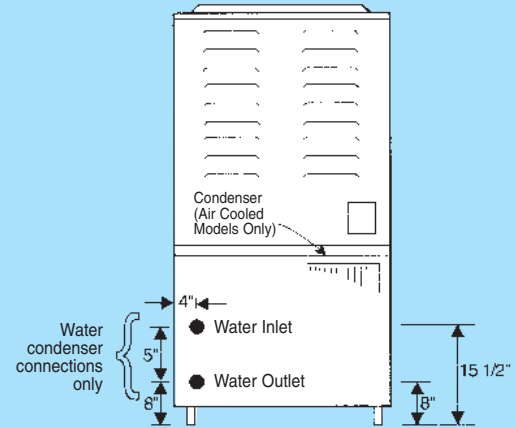

Rear View

### Model UF-253 G/P Description:

Overrun Range \_\_\_\_\_ Up to 40% (Gravity Fed)  
 Overrun Range \_\_\_\_\_ Up to 80% (Pump Fed)  
 Mix Tank Capacity \_\_\_\_\_ 18 qts. each  
 Mix Tank Refrigeration Control \_\_\_\_\_ Electronic  
 Cylinder Refrigeration Control \_\_\_\_\_ Hard-O-Tronic  
 Cylinder Type \_\_\_\_\_ Helicoidal Path  
 Beater Construction \_\_\_\_\_ Stainless Steel  
 Beater Drive Motor \_\_\_\_\_ 1.5 H.P. each cylinder  
 Compressor Motor \_\_\_\_\_ 2.0 H.P. each cylinder  
 Water Connections \_\_\_\_\_ 1/2" M.P.T.  
 Condenser Cooling \_\_\_\_\_ Air or Water  
 Refrigerant Type \_\_\_\_\_ R-404A  
 Frame Type \_\_\_\_\_ Floor Model  
 Frame Construction \_\_\_\_\_ Welded Steel  
 Outer Panels \_\_\_\_\_ Stainless Steel  
 Width \_\_\_\_\_ 22 inches (560 mm)  
 Depth \_\_\_\_\_ 34 inches (840 mm)  
 Height (w/o legs or casters) \_\_\_\_\_ 56 inches (1422 mm)

Caster (swivel type) Height \_\_\_\_\_ 5 inches (127 mm)  
 Net Weight (w/o accessories) \_\_\_\_\_ 700 lbs. (318 kg)  
 Gross Weight (w/o accessories) \_\_\_\_\_ 792 lbs. (360 kg)

### Electrical Requirements

Single Phase, 60 Hz \_\_\_\_\_ 208 - 230 V  
 Max Breaker / Fuse size \_\_\_\_\_ 45 Amps  
 Running Amps \_\_\_\_\_ 36 Amps  
 Three Phase, 60 Hz \_\_\_\_\_ 208 - 230 V  
 Max Breaker / Fuse size \_\_\_\_\_ 40 Amps  
 Running Amps \_\_\_\_\_ 30 Amps  
 Number of Feeders \_\_\_\_\_ 1  
 Nema # \_\_\_\_\_ L15-30

### Optional Accessories

- Mix Tank Wash Kit
- Self Service Kit (handle closing device)
- Adjustable Legs



Distributed by:  
 GTI Designs  
 35 Trade Zone Court  
 Ronkonkoma, NY 11779

Tel: 800 896-4484  
 Fax: 631 981-3509  
 info@gtidesigns.com  
 www.gtidesigns.com

All technical data, pictures, and drawings contained in this document are not binding on the manufacturer, nor can the manufacturer be held liable for any modification of the machine in part or completely.